



**Muon Acceleration with a Very Fast Ramping  
Synchrotron for a Neutrino Factory**

*D.J. Summers*  
*University of Mississippi*

*J.S. Berg and R.B. Palmer*  
*BNL*

*A.A. Garren*  
*UCLA*

June 2003

**CENTER FOR ACCELERATOR PHYSICS**

**BROOKHAVEN NATIONAL LABORATORY**  
**BROOKHAVEN SCIENCE ASSOCIATES**

Under Contract No. DE-AC02-98CH10886 with the  
**UNITED STATES DEPARTMENT OF ENERGY**

#### DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency, contractor or subcontractor thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency, contractor or subcontractor thereof.

# Muon acceleration with a very fast ramping synchrotron for a neutrino factory

D J Summers<sup>1</sup>, J S Berg<sup>2</sup>, A A Garren<sup>3</sup> and R B Palmer<sup>2</sup>

<sup>1</sup> Department of Physics, University of Mississippi, Oxford, MS 38677, USA

<sup>2</sup> Brookhaven National Laboratory, Upton, NY 11973, USA

<sup>3</sup> Department of Physics, University of California, Los Angeles, CA 90095, USA

E-mail: summers@relativity.phy.olemiss.edu

Received 27 January 2003

Published 9 July 2003

Online at stacks.iop.org/JPhysG/29/1727

## Abstract

A 4600 Hz fast ramping synchrotron is explored as an economical way of accelerating muons from 4 to 20 GeV/ $c$  for a neutrino factory. Eddy current losses are minimized by the low machine duty cycle plus thin grain oriented silicon steel laminations and thin copper wires. Combined function magnets with high gradients alternating within single magnets form the lattice we describe. Muon survival is 83%.

## 1. Introduction

Traditionally ramping synchrotrons have provided economical particle acceleration. Here we explore a very fast ramping muon synchrotron for a neutrino factory [1]. The accelerated muons would be stored in a racetrack to produce neutrino beams as they decay ( $\mu^- \rightarrow e^- \bar{\nu}_e \nu_\mu$  or  $\mu^+ \rightarrow e^+ \nu_e \bar{\nu}_\mu$ ). Neutrino oscillations [2] have been observed at experiments such as Homestake [3], Super-Kamiokande [4] and SNO [5]. Further exploration using a neutrino factory could reveal effects such as CP violation in the lepton sector which could explain the matter–antimatter asymmetry of the universe.

This synchrotron must accelerate muons from 4 to 20 GeV/ $c$  with moderate decay loss. Because synchrotron radiation goes as  $m^4$ , muons radiate two billion times  $((105.7/0.511)^4)$  less power than electrons for any given ring diameter and lepton energy. Magnet eddy current losses are minimized by the low duty cycle of the machine plus thin iron laminations and copper conductors. Grain oriented silicon steel is used to provide a high magnetic field with a high  $\mu$  to minimize magnetic energy stored in the return yoke. The magnetic energy stored in the gap is minimized by reducing its size. Cool muons [6] with low beam emittance allow this. Stored energy goes as  $B^2/2\mu$ . The voltage required to drive a magnet is equal to  $-L di/dt$ . Very high voltage is expensive.  $di/dt$  must be large because of the 2  $\mu$ s muon lifetime, so the main option for lowering voltage is to shrink the volume of stored energy to reduce the inductance,  $L$ .

**Table 1.** Combined function magnet cell parameters. Five cells make up an arc and 18 arcs form the ring.

Cell length (m)	5.28
Combined dipole length (m)	2.24
Combined dipole $B_{\text{central}}$ (T)	0.9
Combined dipole gradient ( $\text{T m}^{-1}$ )	20.2
Pure dipole length (m)	0.4
Pure dipole $B$ (T)	1.8
Momentum (GeV/ $c$ )	20
Phase advance/cell (degrees)	72
$\beta_{\text{max}}$ (m)	8.1
Dispersion max (m)	0.392
Normalized trans. acceptance ( $\pi$ mm rad)	4

**Table 2.** Straight section lattice parameters. There are two quadrupoles per straight.

$\phi$	$L_{\text{cell}}/2$	$L_{\text{quad}}$	$dB/dx$	$a$	$\beta_{\text{max}}$	$\sigma_{\text{max}}$	$B_{\text{pole}}$	$U_{\text{mag}}/\text{quad}$
$77^\circ$	11 m	1 m	$7.54 \text{ T m}^{-1}$	5.8 cm	36.6 m	0.0195 m	0.44 T	$\approx 3000 \text{ J}$


Acceleration to 4 GeV might feature fixed field dogbone arcs [7] to minimize muon decay loss. Fast ramping synchrotrons [7, 8] might also accelerate muons to higher energies for a  $\mu^+\mu^-$  collider [9].

## 2. Lattices

As a first step, we form arcs with sequences of combined function cells formed within continuous long magnets, whose poles are alternately shaped to give focusing gradients of each sign. An example of such a cell has been simulated using SYNCH [10]. The example has gradients that alternate from positive  $20 \text{ T m}^{-1}$  gradient (2.24 m long), to zero gradient (0.4 m long) to negative  $20 \text{ T m}^{-1}$  gradient (2.24 m) to zero gradient (0.4 m), etc. The relatively short zero gradient section is included to approximate a real smooth change in the gradients. Details are given in table 1.

It is proposed to use five such arc cells (possibly all in one magnet) to form an arc segment. These segments are alternated with straight sections containing RF. The phase advance through one arc segment is  $5 \times 72^\circ = 360^\circ$ . This being so, dispersion suppression between straights and arcs can be omitted. With no dispersion in the straight sections, the dispersion performs one full oscillation in each arc segment, returning to zero for the next straight as shown in figure 1. There will be 18 such arc segments and 18 straight sections, forming the 18 super-periods in the ring.

Straight sections (22 m) without dispersion are used for superconducting RF, and, in two longer straights (44 m), the injection and extraction. To assure sufficiently low magnetic fields at the cavities, relatively long field free regions are desirable. A straight consisting of two half cells would allow a central gap of 10 m between quadrupoles, and two smaller gaps at the ends. Details are given in table 2. Matching between the arcs and straights is not yet designed. The total circumference of the ring including combined function magnets and straight sections adds up to 917 m ( $18 \times 26.5 + 16 \times 22 + 2 \times 44$ ).

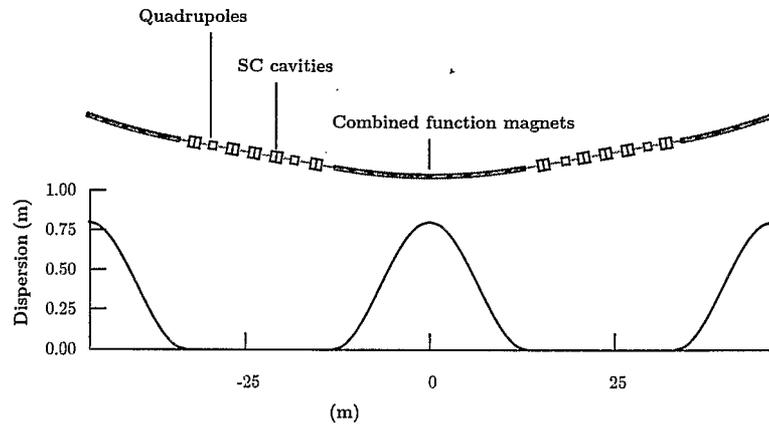

**Figure 1.** Combined function magnets bend the muons in the arcs. Superconducting RF cavities accelerate muons in the straight sections. Two quadrupoles per straight section provide focusing. The straight sections are dispersion free.


**Table 3.** Superconducting RF parameters.

Frequency (MHz)	201
Gap (m)	0.75
Gradient ( $\text{MV m}^{-1}$ )	15
Stored energy (J)	900
Muons per train	$5 \times 10^{12}$
Orbits (4 to 20 GeV/c)	12
Number of RF cavities	160
RF total (MV)	1800
$\Delta U_{\text{beam}}$ (J)	110
Energy loading	0.082
Voltage drop	0.041
Muon acceleration time ( $\mu\text{s}$ )	37
Muon survival	0.83

### 3. Superconducting RF

The RF must be distributed around the ring to avoid large differences between the beam momentum (which increases in steps at each RF section) and the arc magnetic field (which is increasing continuously). RF parameters are shown in table 3.

The amount of RF used is a trade-off between cost and muon survival. Survival is somewhat insensitive to the fraction of stored energy the beam removes from the RF cavities, because the voltage drop is balanced by time dilation. Here, only 8.2% of RF energy is used. One could, in the spirit of *Oliver Twist*, ask for more. Using more of the RF energy is particularly appealing with a smaller ring. Very cold muons require less focusing and allow a smaller ring. If the muons take a few extra turns at the end to accelerate, only a few extra will be lost. Also, extra acceleration time at the end will translate into less voltage needed to ramp magnets.

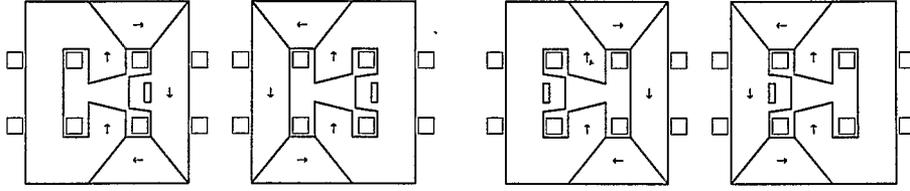

**Figure 2.** Alternating gradient magnet laminations with grain oriented silicon steel. The arrows show both the magnetic field direction and the grain direction of the steel. If needed, four pieces might be used per layer as shown to fully exploit the high permeability and low hysteresis in the grain direction [12, 22, 24, 25] as noted in table 4. The 'C' pieces provide rigidity. Simpler solutions with one or two pieces per layer are under investigation. The horizontal tab increases the gradient by lowering the field to roughly zero on the wide side of the gap. The four coils ( $\square$ ) are wired in parallel.

#### 4. Combined function magnets

The muons accelerate from 4 to 20 GeV. If they are extracted at 95% of full field they will be injected at 19% of full field. For acceleration with a plain sine wave, injection occurs at  $11^\circ$  and extraction occurs at  $72^\circ$ . So the phase must change by  $61^\circ$  in  $37 \mu\text{s}$ . Thus the sine wave goes through  $360^\circ$  in  $218 \mu\text{s}$ , which equals a frequency of 4600 Hz.

Estimate the energy stored in each 26.5 m long combined function magnet. The gap is about 0.14 m wide and has an average height of 0.06 m. Assume an average field of 1.1 T. The permeability constant,  $\mu_0$ , is  $4\pi \times 10^{-7}$ .  $W = B^2/2\mu_0[\text{Volume}] = 110\,000 \text{ J}$ . Next given one turn, an LC circuit capacitor and a 4600 Hz frequency, estimate current, voltage, inductance and capacitance as follows,

$$B = \frac{\mu_0 N I}{h} \rightarrow I = \frac{B h}{\mu_0 N} = 52 \text{ kA}; \quad W = 0.5 L I^2 \rightarrow L = 2W/I^2 = 80 \mu\text{H} \quad (1)$$

$$f = \frac{1}{2\pi} \sqrt{\frac{1}{LC}} \rightarrow C = \frac{1}{L(2\pi f)^2} = 15 \mu\text{F}; \quad W = 0.5 C V^2 \rightarrow V = \sqrt{2W/C} = 120 \text{ kV}. \quad (2)$$

Separate coils might be put around each return yoke to halve the voltage as illustrated in figure 2. The stack of SCRs driving each coil might be centre tapped to halve the voltage again. Four equally spaced coil slots could be put in each side yoke to cut the voltage by five, while leaving the pole faces continuous. 6 kV is easier to insulate than 120 kV. It may be useful to shield or chamfer [12] magnet ends to avoid large eddy currents where the field lines typically do not follow laminations. A dc offset power supply [13] could be useful. Neutrino horn power supplies look promising [11].

Grain oriented silicon steel is chosen for the return yoke due to its high permeability at high field as noted in table 4. This minimizes the energy stored in the yoke which goes as  $B^2/2\mu$ . The skin depth [14] of a  $100 \mu\text{m}$  thick lamination is given by

$$\text{skin depth} = \delta = \sqrt{\rho/\pi f \mu} = \sqrt{47 \times 10^{-8}/\pi \times 4600 \times 1000 \mu_0} = 160 \mu\text{m}. \quad (3)$$

Take  $\mu = 1000\mu_0$  as a limit on magnetic saturation and hence energy storage in the yoke. Next estimate the fraction of the inductance of the yoke that remains after eddy currents shield the laminations [15]. The lamination thickness is  $t$ :

$$L/L_0 = (\delta/t)(\sinh(t/\delta) + \sin(t/\delta))/(\cosh(t/\delta) + \cos(t/\delta)) = 0.995. \quad (4)$$

**Table 4.** Approximate permeabilities of soft magnetic materials. The permeability is  $B/\mu_0 H$ . Grain oriented silicon steel has a much higher permeability parallel ( $\parallel$ ) to its rolling direction than in the perpendicular ( $\perp$ ) direction [16, 17].

Material	1.0 T	1.5 T	1.8 T
1008 Steel	3000	2000	200
Grain oriented ( $\parallel$ )	40 000	30 000	3000
Grain oriented ( $\perp$ )	4000	1000	
NKK Super E-Core	20 000	300	50
Metglas 2605SA1	300 000	10 000	1

**Table 5.** Resistivity, magnetic saturation and coercivity of conductors, cooling tubes and soft magnetic materials. The magnetic materials include 50, 100 [18] and 175  $\mu\text{m}$  [16, 19] thick grain oriented silicon steel, NKK Super E-Core [20] and Metglas [21].

Material	Composition	$\rho$ ( $\mu\Omega \text{ cm}$ )	$B_{\text{max}}$ (T)	$H_c$ (Oe)	Thicknesses ( $\mu\text{m}$ )
Copper	Cu	1.8	—	—	—
Stainless 316L	70 Fe, 18 Cr, 10 Ni, 2 Mo, 0.03 C	74	—	—	—
Titanium 6Al-4V	90 Ti, 6 Al, 4 V	171	—	—	—
1008 Steel	99 Fe, 0.08 C	12	2.09	0.8	—
Grain oriented	3 Si, 97 Fe	47	1.95	0.1	50, 100, 175
NKK Super E-Core	6.5 Si, 93.5 Fe	82	1.8	0.2	50, 100
Metglas 2605SA1	81 Fe, 14 B, 3 Si, 2 C	135	1.6	0.03	30

So it appears that magnetic fields can penetrate 100  $\mu\text{m}$  thick laminations at 4600 Hz. If allowable, thicker 175  $\mu\text{m}$  thick laminations would be half as costly and can achieve a somewhat higher packing fraction.

Calculate the resistive energy loss in the copper coils, which over time is equal to half the loss at the maximum current of 52 000 A. The 1/2 comes from the integral of cosine squared. Table 5 gives the resistivity of copper. Four 5 cm square copper conductors each 5300 cm long have a total power dissipation of 130 kW/magnet. Eighteen magnets give a total loss of 2340 kW. But the neutrino factory runs at 30 Hz. Thirty half cycles of 109  $\mu\text{s}$  per second give a duty factor of 300 and a total  $I^2 R$  loss of 8000 W. Muons are orbited in opposite directions on alternate cycles. If this proves too cumbersome, the duty cycle factor could be lowered to 150:

$$R = \frac{5300(1.8 \mu\Omega \text{ cm})}{(4)(5^2)} = 95 \mu\Omega; \quad P = I^2 R \int_0^{2\pi} \cos^2(\theta) d\theta = 130\,000 \text{ W/magnet.} \quad (5)$$

Find the skin depth of copper at 4600 Hz to see if 0.25 mm (30 gauge) wire is usable:

$$\text{skin depth} = \delta = \sqrt{\rho/\pi f \mu_0} = \sqrt{1.8 \times 10^{-8}/\pi \times 4600 \times \mu_0} = 0.97 \text{ mm.} \quad (6)$$

Now calculate the dissipation due to eddy currents in this 0.25 mm wide conductor, which will consist of transposed strands to reduce this loss [12, 22]. To get an idea, take the maximum  $B$ -field during a cycle to be that generated by a 0.025 m radius conductor carrying 26 000 A. The eddy current loss in a rectangular conductor made of transposed square wires 0.25 mm wide (sometimes called Litz wire [23]) with a perpendicular magnetic field is as follows. The width of the wire is  $w$  and  $B = \mu_0 I/2\pi r = 0.2 \text{ T}$ :

$$P = [\text{Volume}] \frac{(2\pi f B w)^2}{24\rho} = [4 \times 0.05^2 \times 53] \frac{(2\pi \times 4600 \times 0.2 \times 0.00025)^2}{(24)1.8 \times 10^{-8}} = 2800 \text{ kW}. \quad (7)$$

Multiply by 18 magnets and divide by a duty factor of 300 to get an eddy current loss of 170 kW in the copper. Stainless steel water cooling tubes will dissipate a similar amount of power [7]. Alloy titanium cooling tubes would dissipate less.

Calculate the eddy current losses [22] in the 100  $\mu\text{m}$  thick iron laminations. Take a quarter metre square area, a 26.5 m length and an average field of 1.1 T:

$$P = [\text{Vol}] \frac{(2\pi f B t)^2}{24\rho} = [(26.5)(0.5^2)] \frac{(2\pi \times 2600 \times 1.1 \times 0.0001)^2}{(24)47 \times 10^{-8}} = 5900 \text{ kW}. \quad (8)$$

Multiply by 18 magnets and divide by a duty factor of 300 to get an eddy current loss in the iron laminations of 350 kW or  $700 \text{ W m}^{-1}$  of magnet. So the iron will need some cooling. The ring only ramps 30 times per second, so the  $\int \mathbf{H} \cdot d\mathbf{B}$  hysteresis losses will be low, even more so because of the low coercive force,  $H_c$ , of grain oriented silicon steel.

## 5. Conclusions

The low duty cycle of the neutrino factory leads to reasonable eddy current losses in a 4600 Hz ring. Muon survival is 83%. The high permeability of grain oriented silicon steel permits high fields with little energy stored in the yoke. Gradients are switched within dipoles to minimize eddy current losses in ends. Time dilation allows extra orbits with little muon decay at the end of a cooling cycle. This allows one to use more of the stored RF energy. Much of the magnetic field in our lattice is used for focusing rather than bending the muon beam. More muon cooling would lead to less focusing, more bending and an even smaller ring.

## Acknowledgments

This work was supported by the US Dept of Energy and National Science Foundation. Many thanks to K Bourkland, S Bracker, C Jensen, S Kahn, H Pfeffer, G Rees, Y Zhao and M Zisman for their help and suggestions.

## References

- [1] Cline D and Neuffer D 1980 *AIP Conf. Proc.* **68** 846–7  
 Neuffer D 1981 *IEEE Trans. Nucl. Sci.* **28** 2034–6  
 Ayres D *et al* 1999 *Preprint physics/9911009*  
 Palmer R B, Johnson C and Keil E 2000 *Nucl. Instrum. Methods A* **451** 265–78  
 Holtkamp N *et al* 2000 A feasibility study of a neutrino source based on a muon storage ring *Preprint FERMILAB-PUB-00-108-E*  
 Ozaki S *et al* 2001 Feasibility study II of a muon based neutrino source *Preprint BNL-52623* (webpage <http://www.cap.bnl.gov/mumu/studyii>)
- [2] Barger V, Whisnant K and Phillips R J N 1980 *Phys. Rev. Lett.* **45** 2084–8  
 Geer S 1998 *Phys. Rev. D* **57** 6989–97  
 Bilenky S M, Giunti C and Grimus W 1998 *Phys. Rev. D* **58** 033001  
 Albright C *et al* 2000 *Preprint hep-ex/0008064*  
 Barger V, Geer S, Raja R and Whisnant K 2000 *Phys. Rev. D* **62** 073002  
 Barger V, Geer S, Raja R and Whisnant K 2000 *Phys. Rev. D* **62** 013004  
 Cervera A *et al* 2000 *Nucl. Phys. B* **579** 17–55  
 Romanino A 2000 *Nucl. Phys. B* **574** 675–90  
 De Rujula A, Gavela M B and Hernandez P 1999 *Nucl. Phys. B* **547** 21–38  
 Koike M and Sato J 2000 *Phys. Rev. D* **61** 073012  
 Kodama K *et al* (DONUT Collaboration) 2001 *Phys. Lett. B* **504** 218–24

- [3] Cleveland B T *et al* (Homestake Collaboration) 1998 *Astrophys. J.* **496** 505–26  
Davis R 1994 *Prog. Part. Nucl. Phys.* **32** 13–32  
Davis R, Harmer D S and Hoffman K C 1968 *Phys. Rev. Lett.* **20** 1205–9  
Davis R 1964 *Phys. Rev. Lett.* **12** 303–5
- [4] Fukuda Y *et al* (Super-Kamiokande Collaboration) 1998 *Phys. Rev. Lett.* **81** 1562–7  
Fukuda S *et al* (Super-Kamiokande Collaboration) 2001 *Phys. Rev. Lett.* **86** 5651–5
- [5] Ahmad Q R *et al* (SNO Collaboration) 2002 *Phys. Rev. Lett.* **89** 011301  
Ahmad Q R *et al* (SNO Collaboration) 2002 *Phys. Rev. Lett.* **89** 011302  
Ahmad Q R *et al* (SNO Collaboration) 2001 *Phys. Rev. Lett.* **87** 071301  
Boger J *et al* (SNO Collaboration) 2000 *Nucl. Instrum. Methods A* **449** 172–207  
Chen H H 1985 *Phys. Rev. Lett.* **55** 1534–6
- [6] Ado Y M and Balbekov V I 1971 *Sov. Atom. Energ.* **31** 731–6  
Skrinsky A N and Parkhomchuk V V 1981 *Sov. J. Part. Nucl.* **12** 223–47  
Neuffer D 1983 *Part. Accel.* **14** 75–8  
Fernow R and Gallardo J 1995 *Phys. Rev. E* **52** 1039–42  
Balbekov V I and Van Ginneken A 1998 *AIP Conf. Proc.* **441** 310–3  
Penn G and Wurtele J S 2000 *Phys. Rev. Lett.* **85** 764–7  
Wang C X and Kim K Y 2002 *Phys. Rev. Lett.* **88** 184801  
Alsharo'a M M *et al* 2002 *Preprint hep-ex/0207031*
- [7] Summers D J 2001 *Preprint hep-ex/0208010*
- [8] Summers D, Neuffer D, Shu Q S and Willen E 1997 *Preprint physics/0109002*  
Summers D J 1996 *Preprint physics/0108001*  
Summers D J (SESAPS, Newport News, VA) 1994 *Bull. Am. Phys. Soc.* **39** 1818
- [9] Neuffer D 1987 *AIP Conf. Proc.* **156** 201–8  
Cline D B 1994 *Nucl. Instrum. Methods A* **350** 24–6  
Neuffer D V 1994 *Nucl. Instrum. Methods A* **350** 27–35  
Barger V *et al* 1995 *Phys. Rev. Lett.* **75** 1462–5  
Palmer R *et al* 1996 *Nucl. Phys. Proc. Suppl.* **A 51** 61–84  
Raja R and Tollestrup A 1998 *Phys. Rev. D* **58** 013005  
Ankenbrandt C M *et al* 1999 *Phys. Rev. ST Accel. Beams* **2** 081001
- [10] Garren A A, Kenney A S, Courant E D and Syphers M J 1985 *Preprint FERMILAB-FN-420*
- [11] Bourkland K, Roon K and Tinsley D (NuMI Collaboration) 2002 205 KA power supply for neutrino focusing horns *Preprint FERMILAB-CONF-02-122-E*
- [12] Marks N 1994 *Conventional Magnets—I and II CERN Accelerator School Proc. (University of Jyväskylä)* CERN 94-01 vol II pp 867–911
- [13] White M G, Shoemaker F C and O'Neill G K 1956 A 3 BeV high intensity proton-synchrotron *CERN Symp. on High Energy Accelerators and Pion Physics* CERN 56-25 vol 1 pp 525–9  
Fox J A 1965 Resonant magnet network and power supply for the 4 GeV electron synchrotron *Nina Proc. IEE* **112** 1107–26  
Westendorp W F 1945 *J. Appl. Phys.* **16** 657–60
- [14] Lorrain P, Corson D and Lorrain F 1988 *Electromagnetic Fields and Waves* 3rd edn (San Francisco: Freeman) pp 537–42
- [15] Scott K L 1930 Variation of the inductance of coils due to the magnetic shielding effect of eddy currents in the cores *Proc. Inst. Radio Eng.* **18** 1750–64
- [16] A K Steel, Butler, PA. webpage [http://www.aksteel.com/markets/electrical\\_steels.asp](http://www.aksteel.com/markets/electrical_steels.asp)
- [17] Bozorth R M 1951 *Ferromagnetism* (Princeton, NJ: Van Nostrand) pp 90–1
- [18] Arnold Engineering, Marengo, IL. webpage <http://www.grouparnold.com>
- [19] Allegheny Ludlum, Pittsburgh, PA. webpage <http://www.alleghenyludlum.com>
- [20] NKK Corp, Tokyo. webpage <http://www.nkk.co.jp/en/products/steel/e-core/en/e-core.html>
- [21] Honeywell, Conway, SC. webpage <http://www.metglas.com>
- [22] Sasaki H 1992 Magnets for fast-cycling synchrotrons *Talk at Int. Conf. on Synchrotron Radiation Sources (Indore)* KEK 91-216
- [23] MWS Wire Industries, Westlake Village, CA. webpage <http://www.mwswire.com/litzmain.htm>
- [24] Schwandt P 1989 Comparison of realistic core losses in the booster ring dipole magnets for grain-oriented and ordinary lamination steels *Preprint TRIUMPH-DN-89-K31*
- [25] Nakata T *et al* 1984 Influence of lamination orientation and stacking on magnetic characteristics of grain oriented silicon steel laminations *IEEE Trans. Magn.* **20** 1774–9