

Figure 2: Tune as a function of longitudinal beam crossing position. Cogging by one acceleration bucket moves the crossing point by 5 m.

wide with a mean of about 15 hours. The average bunch intensity for all stores in the plot is $N_b = 0.4 \cdot 10^{11}$. Gold beam lifetimes are generally lower due to intra-beam scattering. A deuteron beam without collisions, in a lattice with $\beta^* = 2 - 10$ m, provides a good comparison to see the impact of the beam-beam interaction. Its lifetime is only marginally influenced by intra-beam scattering or nonlinear triplet errors. 55 bunches with $N_b = 0.5 \cdot 10^{11}$, stored for an hour, showed a lifetime of 830 h.

From the change in the beam intensity and the observed luminosity an estimate for the emittance growth can be obtained, assuming the same emittance in both beams. For proton-proton collisions we find $\Delta\epsilon/\epsilon = 4\%$ in the first store hour (with an rms value of 5%). For comparison, no emittance growth was observed with the ionization profile monitor in the deuteron beam measurement without beam-beam interaction.

3 WORKING POINT AND BACKGROUND

Both transverse RHIC fractional tunes (Q_x, Q_y) are kept between 0.2 and 0.25, and during stores close to the coupling resonance $Q_x = Q_y$. In this area the lowest order

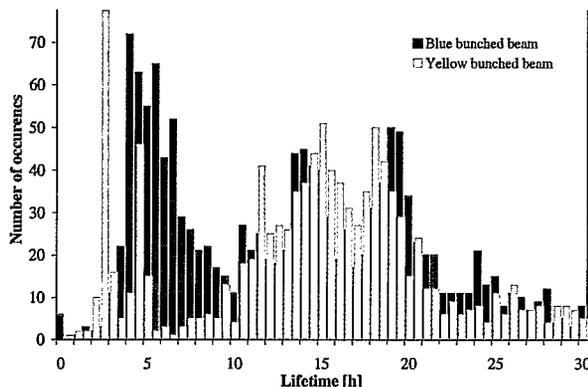


Figure 3: Blue and Yellow bunched beam lifetimes with proton-proton collision during one month of operation.

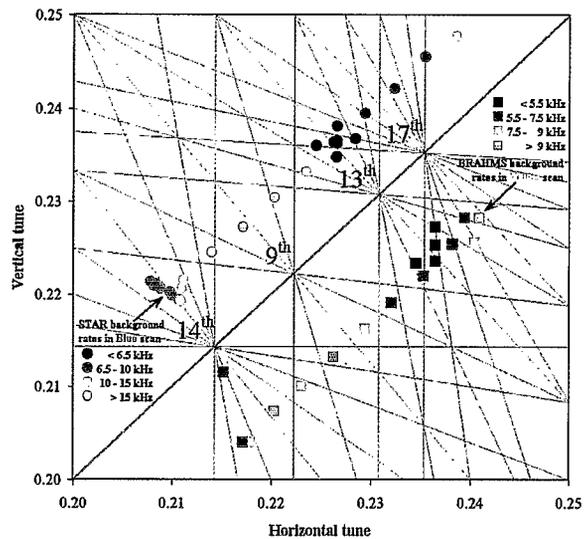


Figure 4: Experimental background rates as a function of fractional tunes. For these measurements deuterons in the Blue ring collide with gold ions in the Yellow ring. The total beam-beam tune spread due to the beam-beam interaction is about $\Delta Q_{tot} = 0.005$ in both measurements.

resonances are of order 9, 13, 14 and 17 (Fig. 4). If the nonlinear dynamics are dominated by the beam-beam interaction and the crossing angles are all zero, no odd-order resonances are driven.

Experimental background rates were observed as a function of the tunes with deuteron-gold collisions (Fig. 4). The tunes were moved parallel to the $Q_x = Q_y$ line, scanning the area considered for operation. With both beams, high background rates were found near 9th order resonances, and low background rates near 13th order resonances. The working points with low background rates are used in operation. High background rates near 9th order resonances are another sign of residual crossing angles (cf. Fig. 2). Increased background rates were also found with a transverse offset [4].

4 STRONG-STRONG OBSERVATIONS

RHIC sees strong-strong beam-beam effects. In addition to the tune (σ -mode) a new transverse oscillation mode (π -mode) occurs. For a single collision per turn the π -mode is at a tune $Y\xi$ below the σ -mode, where $Y \approx 1.2$ for round beams [5]. If the beam-beam interaction is the dominant nonlinear effect, the π -mode can be outside the continuous spectrum and thus be undamped [6].

Coherent beam-beam modes were observed in an experiment with proton beams, with a beam-beam parameter $\xi = 0.003$ and a single collision per turn (Fig. 5). The measured difference between the σ - and π -modes is consistent with a Yokoya factor of $Y \approx 1.2$. The locations of the π -modes were reproduced in a strong-strong simulation [8]. π -modes were also observed in routine operation with a beam-beam parameter $\xi = 0.0015$, four collisions per turn and linear coupling (Fig. 6). The π -modes could be suppressed by small changes in one of the tunes.

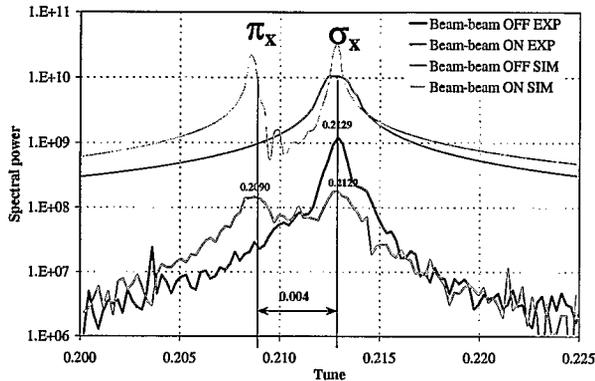


Figure 5: Coherent dipole modes in an experiment with a single proton bunch per beam, and in a corresponding simulation [8]. $\xi = 0.003$, spectra from 4096 turns.

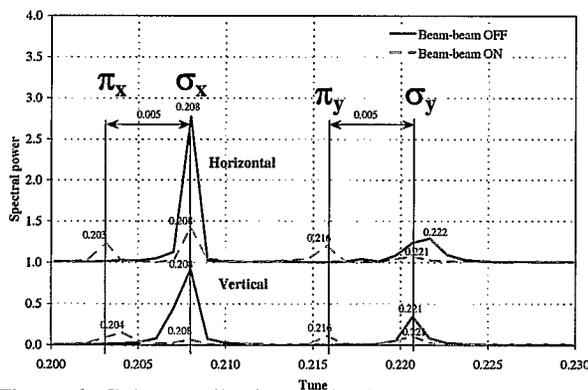


Figure 6: Coherent dipole modes in operation with 4 collisions per turn. $\xi = 0.0015/\text{IP}$, spectra from 1024 turns.

5 UNEQUAL RF FREQUENCIES

When the two RHIC beams have different radio frequencies f_{rf} the beam crossing points move longitudinally with the speed

$$v_{CP} = \frac{c \Delta f_{rf}}{2 f_{rf}}, \quad (1)$$

where c is the particle speed. Values of $\Delta f_{rf} = 5$ Hz and $v_{CP} = 27$ m/s are typical for gold beams in both rings. When deuteron and gold beams were injected with the same rigidity, $\Delta f_{rf} = 44$ kHz is needed and $v_{CP} = 3$ m/turn. Beams experience the beam-beam interaction only when the crossing point is between the DX magnets (Fig. 1). With slowly moving crossing points (gold-gold case) the beam-beam interaction is modulated, with fast moving crossing points (deuteron-gold case) beams experience pseudo random interactions in time.

Slowly moving crossing points and head-on collisions lead to tune modulation and to unacceptable beam lifetime [9]. The tune modulation depth is determined by the beam-beam parameter, the modulation waveform by the crossing angle, and the modulation frequency by the fill pattern and the difference in the rf frequencies Δf_{rf} . Fig. 7 shows a case typical for gold-gold operation. To avoid this unwanted effect, beams are transversely separated during ramps. For proton beams, which do not pass through transition, the frequencies were locked on the ramp [10].

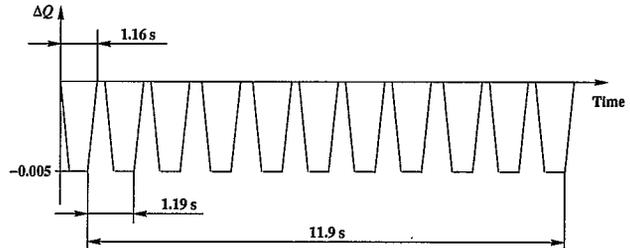


Figure 7: Tune modulation of particles in the center of a bunch due to moving collision points, for $\Delta f_{rf} = 5$ Hz, no crossing angle, 60 bunches and a total beam-beam tune shift of $\Delta Q_{tot} = -0.005$.

The fast moving crossing points with deuteron and gold beams, injected at the same rigidity, lead to unacceptable beam lifetime even with large beam separation. Both beams experienced pseudo-random dipole kicks that lead to emittance growth. Beams had to be injected at the same relativistic γ , and therefore the same rf frequency, to avoid this effect.

6 SUMMARY

The beam-beam interaction has a significant impact on lifetime and emittance of the RHIC beams. In addition to beam-beam effects observed in other hadron colliders, coherent beam-beam modes were seen for the first time. With independent rf systems for both rings, differences in the rf frequencies can lead to tune modulation and emittance growth.

7 REFERENCES

- [1] T. Roser, "RHIC status and plans", these proceedings.
- [2] P. Cameron et al., "RHIC third generation PLL tune system", these proceedings.
- [3] S. Saritepe, G. Goderre, and S. Peggs, "Observations of the beam-beam interaction in hadron colliders", in "Frontiers of particle beams: intensity limitations", Springer-Verlag, Lecture Notes in Physics (1991).
- [4] A. Drees, Z. Xu, H. Huang, "Results from vernier scans at RHIC during runs 2000-2003", these proceedings.
- [5] K. Yokoya and H. Koiso, "Tune shift of coherent beam-beam oscillations", Part. Accel. Vol. 27, pp. 181-186 (1990).
- [6] Y. Alexahin, "On the Landau Damping and Decoherence of Transverse Dipole Oscillations in Colliding Beams", Part. Accel., V59, p. 43; CERN-SL-96-064 (AP) (1996).
- [7] W. Fischer, L. Ahrens, M. Bai, M. Blaskiewicz, P. Cameron, R. Michnoff, F. Pilat, V. Ptitsyn, T. Sen, S. Tepikian, D. Trbojevic, M. Vogt, and J. van Zeijts, "Observation of coherent beam-beam modes in RHIC", BNL C-A/AP/75 (2002).
- [8] M. Vogt, J.A. Ellison, W. Fischer, and T. Sen, "Simulations of coherent beam-beam modes at RHIC", proceedings of the 2002 European Particle Accelerator Conference, Paris (2002).
- [9] W. Fischer, P. Cameron, S. Peggs, and T. Satogata, "Tune modulation from beam-beam interaction and unequal radio frequencies in RHIC", BNL C-A/AP/72 (2002).
- [10] M. Brennan et al., "Operation of the RHIC rf system", these proceedings.